




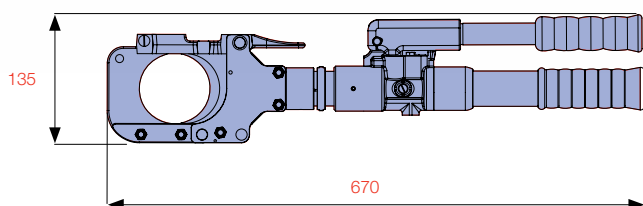

HC-85S



HC-85R


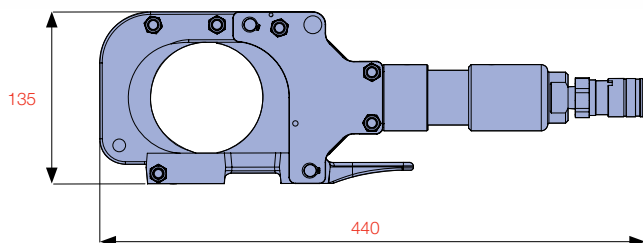


THE **HC-SERIES** OF REMOTE AND SELF-CONTAINED HYDRAULIC CUTTERS CONSISTS OF SIX MODELS WITH A CUTTING CAPACITY UP TO 120 MM DIAMETER.


They cut with ease through cable, round bar, wire rope, wire strand and more. They are a proven performer in the electrical, railway, mining, manufacturing and construction industries. The HC Series Cutters feature superior guillotine-type cutting, flip-top latch for easy insertion of cutting material and blades that are easily replaceable. The two larger self-contained models incorporate a two stage pump. All models are spring return and the self-contained models have a 180° rotating head. The remote models can be operated by a 700 bar single acting hydraulic pump or power unit. They are compact, lightweight, easy to use and are supplied in a heavy duty canvas carry bag.



HC-55R

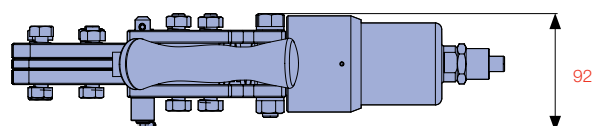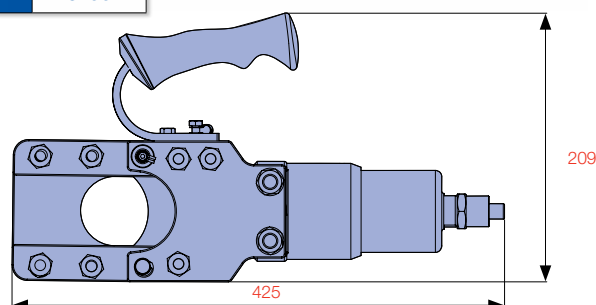



Model No.	Operation	Wire Rope			Soft Steel Bar (mm)	Reinforcing Rod (mm)	Copper Cable (mm)	Aluminium Cable (mm)	ACSR (mm)
		6x7 (mm)	6x12 (mm)	6x19 (mm)					
HC-24S	Self-contained	18	24	24	20	16	24	24	24
HC-45S	Self-contained	22	25	25	20	16	45	45	45
HC-55R	Remote	25	30	30	22	19	50	50	50
HC-85R	Remote	-	-	-	-	-	85	85	-
HC-85S	Self-contained	-	-	-	-	-	85	85	-
HC-120R	Remote	-	-	-	-	-	120	120	-

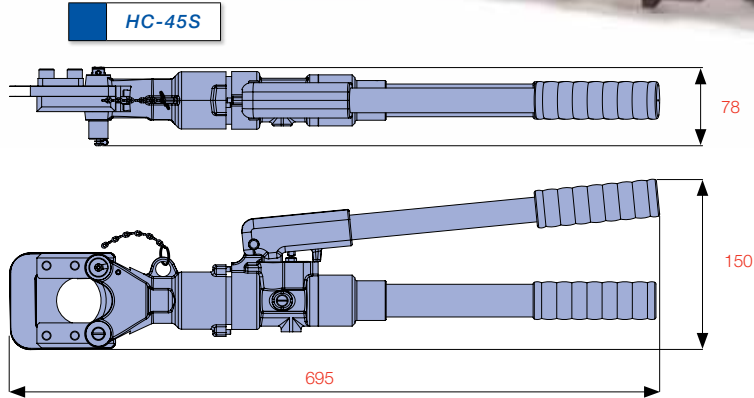

CUTTING CAPACITY UP TO  
**120 mm diam.**

OPERATION  
**Remote & Self-Contained**

MAXIMUM OPERATING PRESSURE  
**700 bar**

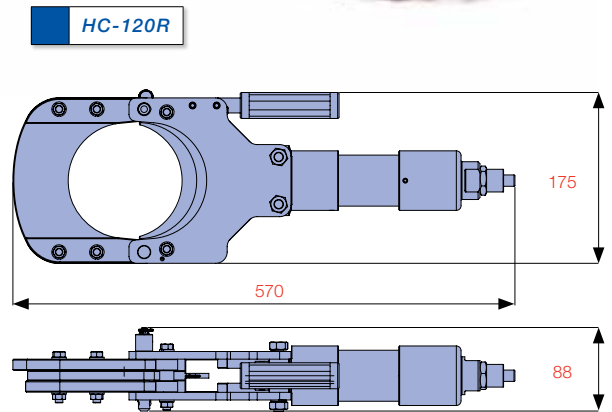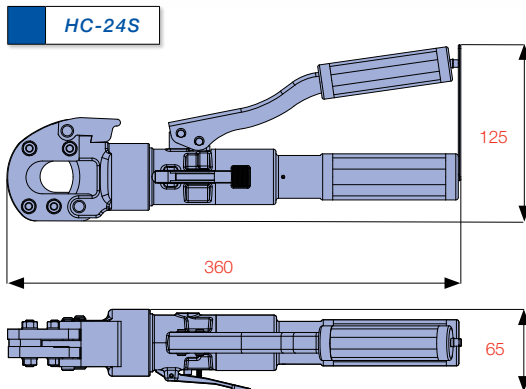

Guy Wire		CCP Cable (mm)	Max. Pressure (bar)	Oil Required (cc)	Max. Output (ton)	Cylinder Stroke (mm)	Weight (kg)
1x7 (mm)	1x19 (mm)						
16	16	-	700	56	6.7	28.0	4.0
16	20	-	700	145	10.0	50.0	7.0
16	20	-	700	106	14.9	55.6	9.0
-	-	85	700	73	5.6	90.8	5.1
-	-	85	700	168	5.6	90.8	9.0
-	-	120	700	193	10.6	129.6	10.0