

THE DRJ-15 RAIL JACK IS IDEALLY SUITED TO ALIGNING, GAUGING AND LIFTING OF RAIL OR SLEEPERS.

Utilising a forged aluminium base plus housing, this 15 ton capacity jack has been designed to be robust, lightweight and reduce the risk of operator injury. It has a spring return mechanism that will allow a jack with no load to be returned to the retracted position. The jack is fitted with an internal safety pressure relief valve to protect against overloading and features a quick release button for fast retraction speed. The bladder system inside the aluminium protected reservoir allows the jack to be used in both the horizontal and vertical positions making it exceptionally versatile.



CAPACITY
15 ton
STROKE
220 mm



QUICK RELEASE

for fast retraction speed

CARRYING HANDLE

in-line padded handle

RELEASE VALVE


allows for controlled lowering and is recessed for protection against accidental knocks

INTERNAL OIL RESERVOIR BLADDER

allows operation in horizontal or vertical position

LARGE ALUMINIUM BASE

one piece forged aluminium (7075T) provides great support in soft ballast

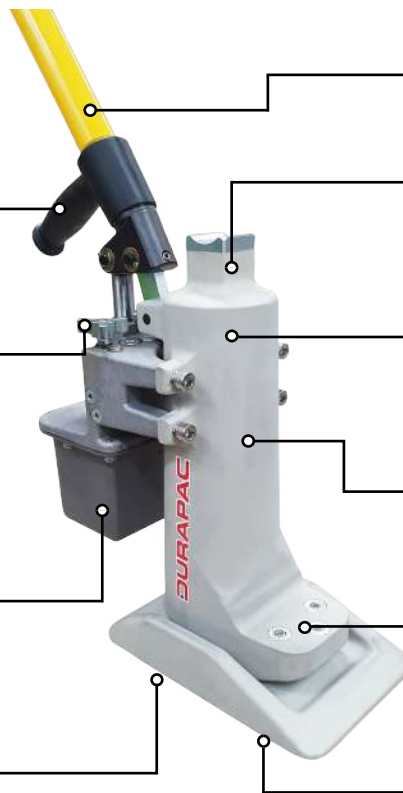

REMOVABLE EXTENSION HANDLE

93 cm

CHROME PLATED

steel piston rod resists corrosion and extends life

INTERNAL SPRING RETURN

allows an unloaded jack to return to the retracted position

INTERNAL KEY

minimises swivel and allows for a safe, stable platform

LOAD CAPACITY

15 ton of lifting force & replaceable serrated washers for non-slip lifting

MINIMUM BASE HEIGHT

60 mm for easy positioning under the base of the rail

| Model No. | Jack Capacity ton | Collapsed Height (mm) | Stroke (mm) | Extended Height (mm) | Travel/Pump Stroke (mm) | L x W x H Base Dimensions (mm) | L x W x H Toe Dimensions (mm) | Weight without Handle (kg) |
|-----------|-------------------|-----------------------|-------------|----------------------|-------------------------|--------------------------------|-------------------------------|----------------------------|
| DRJ-15 | 15 | 400 | 220 | 620 | 4.1 | 250 x 160 x 53 | 64 x 95 x 60 | 20.1 |