

THE **ALJ-SERIES** OF AIR DRIVEN HYDRAULIC JACKS ARE A FIELD PROVEN ECONOMICAL CHOICE OF JACK FOR LIFTING TRUCKS, BUSES AND ALL TYPES OF INDUSTRIAL AND AGRICULTURAL VEHICLES WHEN COMPRESSED AIR IS AVAILABLE.

All models feature a hard chrome plated hydraulic cylinder and reliable air-hydraulic pump. Extension saddles are included with each model and all jacks are supplied pre-filled with oil and ready for immediate use.



Model No.	Jack Capacity (ton)	A		Stroke & Capacity							
		Collapsed Height (mm)	Total Stroke (mm)	B		C		D		E	
				1st Stage	2nd Stage	3rd Stage	4th Stage				
Capacity (ton)	Stroke (mm)	Capacity (ton)	Stroke (mm)	Capacity (ton)	Stroke (mm)	Capacity (ton)	Stroke (mm)	Capacity (ton)	Stroke (mm)		
ALJ30-1-360	30	360	267	30	267	-	-	-	-	-	-
ALJ30-2-150	30 / 15	150	139		73	15	66	-	-	-	-
ALJ30-2-170	30 / 15	170	169		86	15	83	-	-	-	-
ALJ50-2-215	50 / 25	215	229	50	115	25	114	-	-	-	-
ALJ60-1-420	60	420	311	60	311	-	-	-	-	-	-
ALJ60-3-175	60/40/20	175	247		82	40	81	20	84	-	-
ALJ60-4-150	60/40/22/11	150	243		57	40	60	22	61	11	65
ALJ80-2-230	80/50	230	213		80	111	50	102	-	-	-

**SPRING LOADED CONTROL VALVE**

to advance, hold or retract the jack

**CE CERTIFICATION**

ensures compliance and reliability

**TILT ADJUSTABLE HANDLE**

can be locked in 3 positions for ease of manoeuvring

**LOWERING VALVE**

for automatic control of lowering speed for safety

**EXTENSION SADDLES**


two included with each jack to increase height and versatility (excluding locking collar models)

**HARD CHROME PLATED PISTON ROD**

for maximum corrosion resistance and cylinder life

**SOLID WHEELS**

for ease of manoeuvring

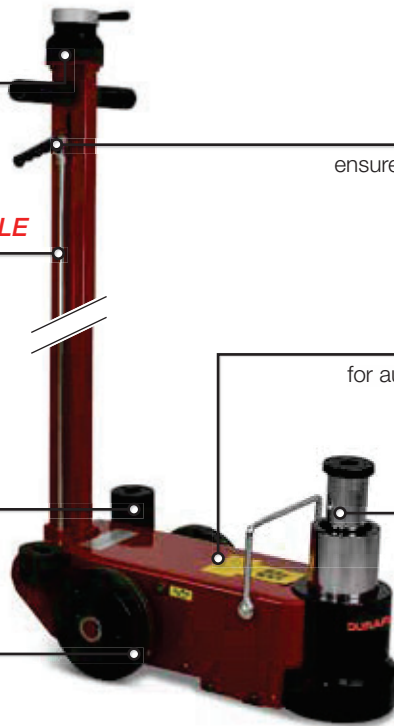

CAPACITY  
**30 - 80 ton**

STROKE MAXIMUM  
**311 mm**

AIR PRESSURE RANGE  
**8 - 12 bar**

**JACKS**

F	G	H	I	J	K	Weight (kg)
Handle Height (mm)	Length (mm)	Body Width (mm)	Width at Wheels (mm)	Extension Height (mm)		
1,380	842	215	282	45	100	86
1,300	480	176	290	75	45	38
1,380	580	162	290	75	45	47
1,380	805	200	282	75	45	73
1,380	910	215	295	100	200	126
1,380	875	215	295	75	45	73
1,380	905	215	295	75	45	66
1,380	930	254	340	75	45	106

