

### GAUGE ADAPTORS

**FGA-1**

3/8"-NPT male x 3/8"-NPT female x 1/4"-NPT female gauge adaptor on 16° angle




**FGA-3**

3/8"-NPT male x 3/8"-NPT female x 1/4"-NPT female gauge adaptor on 16° angle




**FGA-18**

3/8"-NPT male x 3/8"-NPT female x 1/4"-NPT female gauge adaptor

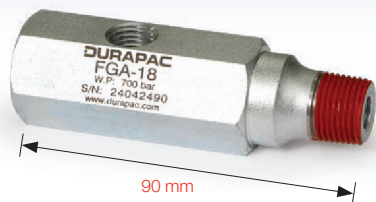

**FGA-2**

3/4"-16UNF x 9/16"-18UNF x 9/16"-18UNF 4,000 bar W.P gauge adaptor. Includes connection nipples to suit PG-100-40K and PG-100-60K pressure gauges and P-2100H hand pump

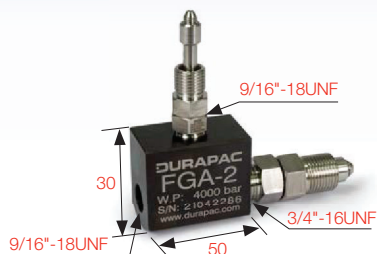

**PG-100-40K**

100 mm diam. 0-2,700 bar / 0-40,000 psi 9/16"-18UNF Female

**PG-100-60K**

100 mm diam. 0-4,000 bar / 0-60,000 psi 9/16"-18UNF Female

THE **PG-SERIES** HYDRAULIC PRESSURE GAUGES ARE RECOMMENDED FOR MONITORING ALL HYDRAULIC SYSTEMS.

Models are available from 63-150 mm face diameter and feature high quality stainless steel construction. Analogue models are liquid filled to increase longevity and are accurate to within 1% excluding model PG-63 (1.6%). The battery powered PGD-75 digital pressure gauge can be programmed with a cylinder effective area, quickly set to read in force measurements (kN, tonne, kg) or pressure measurements (bar, psi). It is accurate to within 0.25% and includes pressure peak hold functionality.

### GAUGES

**PGD-75**

75 mm diam. 0-10,000 bar / 0-11,600 psi 1/4"-NPT Male



**PG-63**

63 mm diam. 0-1,000 bar / 0-14,500 psi 1/4"-NPT Male

**PG-100**

100 mm diam. 0-1,000 bar / 0-14,500 psi 1/4"-NPT Male

**PG-150**

150 mm diam. 0-1,000 bar / 0-14,500 psi 1/4"-NPT Male



*Suitable for High Pressure*

