

THE **RG-SERIES** IS A GENERAL PURPOSE SPRING RETURN CYLINDER DESIGNED FOR USE IN PRODUCTION, MAINTENANCE, JACKING AND FABRICATION APPLICATIONS.

All RG-Series cylinders feature a hard chrome cylinder bore and piston rod for maximum corrosion resistance. When combined with bronze overlay on the piston bearing area and low friction surface treatment on the gland nut, this cylinder is suitable for demanding applications. Cylinder body mounting threads and base mounting holes are included on most models. Optional TSX tilt saddles are available for all models from RG-102 to RG-10010.



EXCEEDS
ANSI/ASME B30.1
SAFETY
STANDARDS



HARDENED GROOVED LOAD CAP

to prevent piston rod damage.
Optional tilt saddles available

GLAND NUT

with low friction coating withstands
full dead end loading

HARD CHROME PLATED PISTON ROD

for maximum corrosion resistance
and cylinder life

HARD CHROME PLATED BORE

for maximum corrosion resistance
and cylinder life

BRONZE OVERLAY

on piston bearing area reduces
side load induced damage and
extends cylinder life

CYLINDER BODY MOUNTING THREADS

piston rod threads and base
mounting holes permit easy fixture

PISTON ROD WIPER

reduces contaminants

RETURN SPRINGS


are sized to ensure efficient piston
rod return and maximum spring life

POWDER COATED FINISH

enhances appearance
and reduces corrosion

PARKER

industry standard high flow
coupling for compatibility

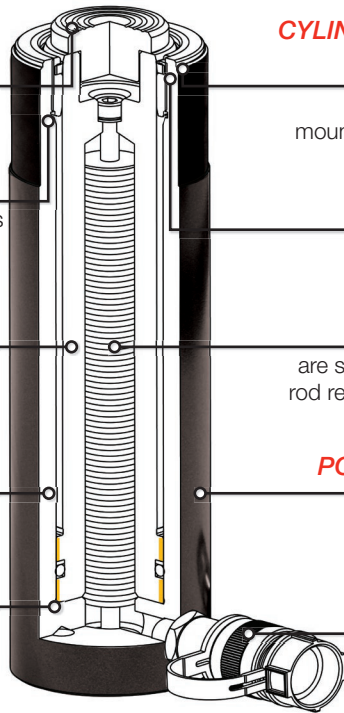

CAPACITY RANGE


5 - 100 ton

STROKE RANGE

16 - 362 mm

MAXIMUM OPERATING
PRESSURE

700 bar



Durapac offer a range of piston and
base attachments to suit the **RG-Series**
cylinders. Refer to Cylinder Accessories
for more details



26 POINT TANK JACKING SYSTEM




MOUNTING BLOCKS

BASE AND PISTON CLEAVISES

JACKING BASES



SINGLE ACTING COLLAR THREAD CYLINDERS

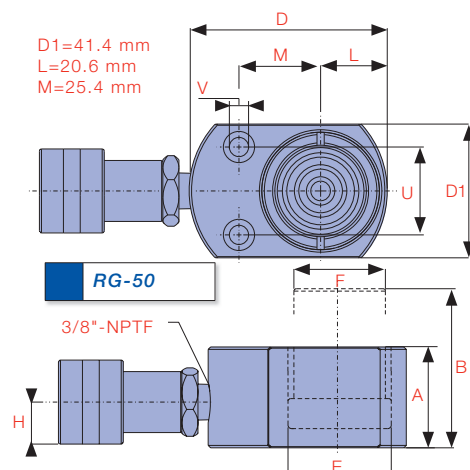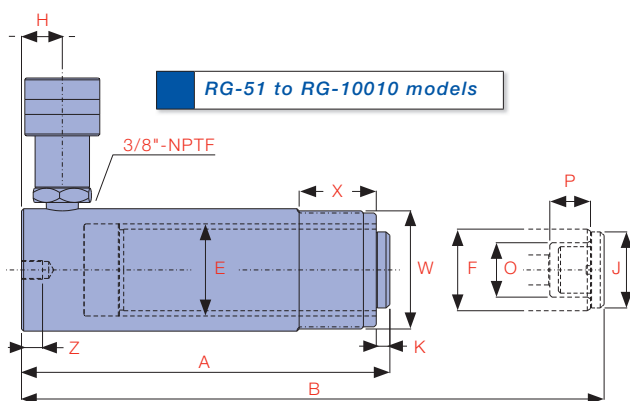


Model Number	Cylinder Capacity ton* / kN	Stroke (mm)	Cylinder Effective Area (cm ²)	Oil Capacity (cm ³)	A Collapsed Height (mm)	B Extended Height (mm)	D Outside Diameter (mm)	E Cylinder Bore Diameter (mm)	F Piston Rod Diameter (mm)	H Base to Advance Port (mm)	J Standard Load Cap Diameter (mm)	K Load Cap Protrusion from Piston Rod (mm)	
RG-50	5	45	16	6.5	10	41	57	58	28.7	25.4	19	**	**
RG-51		45	25	6.5	16	110	135	38	28.7	25.4	19	25	6
RG-53		45	76	6.5	49	165	241	38	28.7	25.4	19	25	6
RG-55		45	127	6.5	82	215	342	38	28.7	25.4	19	25	6
RG-57		45	177	6.5	114	273	450	38	28.7	25.4	19	25	6
RG-59		45	232	6.5	150	323	555	38	28.7	25.4	19	25	6
RG-101	10	101	26	14.5	38	89	115	57	42.9	38.1	19	-	-
RG-102		101	54	14.5	78	121	175	57	42.9	38.1	19	35	6
RG-104		101	105	14.5	152	171	276	57	42.9	38.1	19	35	6
RG-106		101	156	14.5	226	247	403	57	42.9	38.1	19	35	6
RG-108		101	203	14.5	294	298	501	57	42.9	38.1	19	35	6
RG-1010		101	257	14.5	372	349	606	57	42.9	38.1	19	35	6
RG-1012		101	304	14.5	440	400	704	57	42.9	38.1	19	35	6
RG-1014		101	356	14.5	515	450	806	57	42.9	38.1	19	35	6
RG-151	15	142	25	20.3	51	124	149	69	50.8	41.4	19	38	9
RG-152		142	51	20.3	103	149	200	69	50.8	41.4	19	38	9
RG-154		142	101	20.3	205	200	301	69	50.8	41.4	19	38	9
RG-156		142	152	20.3	308	271	423	69	50.8	41.4	25	38	9
RG-158		142	203	20.3	411	322	525	69	50.8	41.4	25	38	9
RG-1510		142	254	20.3	515	373	627	69	50.8	41.4	25	38	9
RG-1512		142	305	20.3	618	423	728	69	50.8	41.4	25	38	9
RG-1514		142	356	20.3	721	474	830	69	50.8	41.4	25	38	9
RG-251	25	232	26	33.2	86	139	165	85	65.0	57.2	25	50	10
RG-252		232	50	33.2	166	165	215	85	65.0	57.2	25	50	10
RG-254		232	102	33.2	339	215	317	85	65.0	57.2	25	50	10
RG-256		232	158	33.2	524	273	431	85	65.0	57.2	25	50	10
RG-258		232	210	33.2	697	323	533	85	65.0	57.2	25	50	10
RG-2510		232	261	33.2	866	374	635	85	65.0	57.2	25	50	10
RG-2512		232	311	33.2	1032	425	736	85	65.0	57.2	25	50	10
RG-2514		232	362	33.2	1205	476	838	85	65.0	57.2	25	50	10
RG-308	30	295	209	42.1	878	387	596	101	73.2	57.2	57	50	10
RG-502	50	498	51	71.2	363	176	227	127	95.3	79.5	33	71	2
RG-504		498	101	71.2	719	227	328	127	95.3	79.5	33	71	2
RG-506 [†]		498	159	71.2	1,132	282	441	127	95.3	79.5	35	71	2
RG-5013		498	337	71.2	2,400	460	797	127	95.3	79.5	35	71	2
RG-756	75	718	156	102.6	1,600	285	441	146	114.3	95.3	30	71	5
RG-7513		718	333	102.6	3,415	492	825	146	114.3	95.3	30	71	5
RG-1004	100	933	102	133.3	1,354	205	306	177	130.3	104.9	30	71	2
RG-1006		933	168	133.3	2,239	357	525	177	130.3	104.9	41	71	2
RG-1008		933	203	133.3	2,708	357	560	177	130.3	104.9	41	71	2
RG-10010		933	260	133.3	3,465	449	709	177	130.3	104.9	41	71	2

* Nominal Cylinder Capacity in ton - see kN values for actual capacity


** RG-50 Cylinder has non-removable grooved load cap and no collar thread

† RG-506 cylinder will not fit into jacking base without welded handle being removed


SINGLE ACTING COLLAR THREAD CYLINDERS




RG-51 to RG-5013 models



RG-1006 and RG-10010 models



TSX-10, 50




TSX-100

O Piston Rod Internal Thread	P Piston Rod Thread Length (mm)	Base Mounting Holes			W Collar Thread	X Collar Thread Length (mm)	Weight (kg)	Optional Tilt Saddle				Model Number	Handle Type
		U Bolt Circle Diameter (mm)	V Thread	Z Thread Depth (mm)				Model Number	A (mm)	B*** (mm)	C (mm)		
**	**	28	5.6mm HOLE	-	-	-	1.0	-	-	-	-	RG-50	
3/4"-16UNF	14	25	1/4"-20UNC	14	1-1/2"-16UN	28	1.0	-	-	-	-	RG-51	
3/4"-16UNF	14	25	1/4"-20UNC	14	1-1/2"-16UN	28	1.5	-	-	-	-	RG-53	
3/4"-16UNF	14	25	1/4"-20UNC	14	1-1/2"-16UN	28	1.9	-	-	-	-	RG-55	
3/4"-16UNF	16	25	1/4"-20UNC	14	1-1/2"-16UN	28	2.4	-	-	-	-	RG-57	
3/4"-16UNF	16	25	1/4"-20UNC	14	1-1/2"-16UN	28	2.8	-	-	-	-	RG-59	
#10-24UNC	6	39	5/16"-18UNC	12	2-1/4"-14UN	26	1.8	-	-	-	-	RG-101	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	2.3	TSX-10	35	20	22	RG-102	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	3.3	TSX-10	35	20	22	RG-104	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	4.4	TSX-10	35	20	22	RG-106	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	5.4	TSX-10	35	20	22	RG-108	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	6.4	TSX-10	35	20	22	RG-1010	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	6.8	TSX-10	35	20	22	RG-1012	
1"-8UNC	19	39	5/16"-18UNC	12	2-1/4"-14UN	26	8.2	TSX-10	35	20	22	RG-1014	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	3.3	TSX-10	35	20	22	RG-151	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	4.1	TSX-10	35	20	22	RG-152	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	5.0	TSX-10	35	20	22	RG-154	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	6.8	TSX-10	35	20	22	RG-156	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	8.2	TSX-10	35	20	22	RG-158	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	9.5	TSX-10	35	20	22	RG-1510	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	10.9	TSX-10	35	20	22	RG-1512	
1"-8UNC	25	47	3/8"-16UNC	12	2-3/4"-16UN	30	11.8	TSX-10	35	20	22	RG-1514	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	5.9	TSX-50	50	21	36	RG-251	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	6.4	TSX-50	50	21	36	RG-252	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	8.2	TSX-50	50	21	36	RG-254	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	10.0	TSX-50	50	21	36	RG-256	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	12.2	TSX-50	50	21	36	RG-258	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	14.1	TSX-50	50	21	36	RG-2510	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	16.3	TSX-50	50	21	36	RG-2512	
1-1/2"-16UN	25	58	1/2"-13UNC	19	3-5/16"-12UN	49	17.7	TSX-50	50	21	36	RG-2514	
1-1/2"-16UN	25	-	-	-	3-5/16"-12UN	49	18.1	TSX-50	50	21	36	RG-308	
-	-	95	1/2"-13UNC	19	5"-12UN	55	15.0	TSX-100	71	25	-	RG-502	
-	-	95	1/2"-13UNC	19	5"-12UN	55	19.1	TSX-100	71	25	-	RG-504	♠
-	-	95	1/2"-13UNC	19	5"-12UN	55	23.1	TSX-100	71	25	-	RG-506	♣
-	-	95	1/2"-13UNC	19	5"-12UN	55	37.6	TSX-100	71	25	-	RG-5013	♦
-	-	-	-	-	5-3/4"-12UN	44	29.5	TSX-100	71	25	-	RG-756	♦
-	-	-	-	-	5-3/4"-12UN	44	59.0	TSX-100	71	25	-	RG-7513	♦
-	-	-	-	-	6-7/8"-12UN	44	33.1	TSX-100	71	25	-	RG-1004	♣
-	-	139	3/4"-10UNC	25	6-7/8"-12UN	44	59.0	TSX-100	71	25	-	RG-1006	♦
-	-	139	3/4"-10UNC	25	6-7/8"-12UN	44	61.0	TSX-100	71	25	-	RG-1008	♦
-	-	139	3/4"-10UNC	25	6-7/8"-12UN	44	72.6	TSX-100	71	25	-	RG-10010	♦

HANDLE TYPES: ♠ WELDED ♦ EYEBOLT ♣ THREAD



*** Total cylinder collapsed height with optional tilt load cap equals (dim. A - dim. K + dim. B)

BASE CLEEVES




Model No.	Cylinder Capacity (ton)	Dimensions (mm)						Suits Models
		A	B	C	D	E	F	
CBC-5	5	44	47	14	16	16	25	RG 5 ton
CBC-10	10	63	66	25	22	25	35	RG 10 ton
CBC-15	15	76	66	25	22	25	35	RG 15 ton
CBC-25	25	95	79	38	31	31	41	RG 25 ton

PISTON ROD CLEEVES





Model No.	Cylinder Capacity (ton)	Dimensions (mm)							Suits Models
		A	B	C	D	E	F	G	
CPC-5	5	28	41	14	16	16	19	3/4"-16UNF	RG 5 ton
CPC-1015	10/15	42	61	25	22	25	28	1"-8UNC	RG 10/15 ton
CPC-25	25	57	74	38	31	31	35	1 1/2"-16UN	RG 25 ton

CYLINDER JACKING BASES

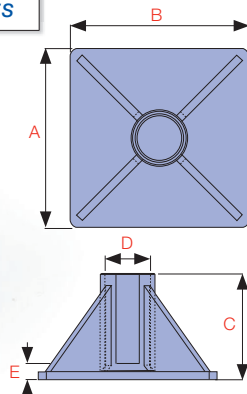

Model No.	Cylinder Capacity (ton)	Dimensions (mm)					Suits Models
		A	B	C	D	E	
CB-10	10	228	228	135	58	20	RG 10 ton
CB-25	25	279	279	140	86	26	RG 25 ton
CB-50	50	300	300	100	130	41	RG 50 ton
CB-50A	50	300	300	100	128	41	RSLC 50 ton

MOUNTING BLOCKS




Model No.	Cylinder Capacity (ton)	Dimensions (mm)				Suits Models
		A	B	C	D	
CMB-5	5	1 1/2"-16UN	88	76	25	RG 5 ton
CMB-10	10	2 1/4"-14UN	114	88	25	RG 10 ton
CMB-15	15	2 3/4"-16UN	101	114	38	RG 15 ton
CMB-25	25	3 5/16"-12UN	127	165	50	RG 25 ton

BASE ATTACHMENT



THREAD ADAPTOR

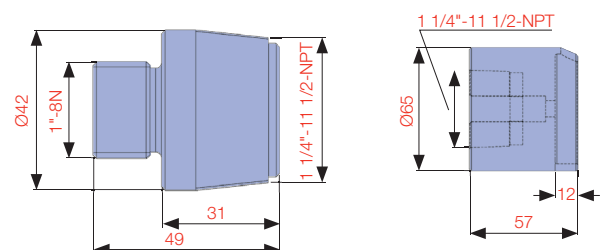

ZAM1245

ZAM1246

ZAM1245 and ZAM1246 allow Durapac RG 10 ton series cylinders (excluding RG-101) to be used with CRK-10 attachments.