

PISTON ROD WIPER

reduces contaminants

HARD CHROME PLATED PISTON ROD

for maximum corrosion resistance and cylinder life

HARD CHROME PLATED BORE

for maximum corrosion resistance and cylinder life

STEEL BASE PLATE

protects base and threaded mounting holes and is removable

THREADED FIT SMOOTH LOAD CAP

to prevent piston rod damage. Optional TSH threaded load caps available

GLAND NUT

with low friction coating withstands full dead end loading

RETURN SPRING



is sized to ensure efficient piston rod return and maximum spring life

BRONZE OVERLAY

on piston bearing area reduces side load induced damage and extends cylinder life



Lightweight aluminium hollow cylinders are available in single and double acting designs - see pages 50 to 53



Optional Threaded Load Caps				Model Number
Model Number	A (mm)	B	C (mm)	
TSH-20	53	1"-8UNC	9	RHS-202
TSH-20	53	1"-8UNC	9	RHS-206
TSH-30	63	1-1/4"-7UNC	9	RHS-302
TSH-30	63	1-1/4"-7UNC	9	RHS-306
TSH-60	91	1-5/8"-5-1/2UN	12	RHS-603
TSH-60	91	1-5/8"-5-1/2UN	12	RHS-604
TSH-60	91	1-5/8"-5-1/2UN	12	RHS-606
TSH-100	126	2-1/2"-8UN	13	RHS-1003
TSH-100	126	2-1/2"-8UN	13	RHS-1006

K Load Cap Protrusion from Piston Rod (mm)	O Piston Rod Internal Thread	P Piston Rod Thread Length (mm)	W Collar Thread	X Collar Thread Length (mm)	Y Centre Hole Diameter (mm)	Base Mounting Holes			Weight (kg)	Model Number	Handle Type
						U Bolt Circle Diameter (mm)	V Thread	Z Thread Depth (mm)			
-	3/4"-16UNF	16	2-3/4"-16UN	30	19.6	50.8	5/16"-18UNC	9.0	2.0	RHS-120	
-	-	-	2-3/4"-16UN	30	19.6	-	-	-	2.8	RHS-121	
-	3/4"-16UNF	16	2-3/4"-16UN	30	19.6	-	-	-	2.8	RHS-1211	
-	-	-	2-3/4"-16UN	30	19.6	50.8	5/16"-18UNC	12.7	4.4	RHS-123	
6.9	1-9/16"-16UN	19	3-7/8"-12UN	38	26.9	82.6	3/8"-16UNC	9.4	7.7	RHS-202	♣
6.9	1-9/16"-17UN	19	3-7/8"-13UN	38	26.9	82.6	3/8"-16UNC	9.4	10.0	RHS-204	♣
6.9	1-9/16"-16UN	19	3-7/8"-12UN	38	26.9	82.6	3/8"-16UNC	9.4	14.1	RHS-206	♣
9.7	1-13/16"-16UN	22	4-1/2"-12UN	42	33.3	92.2	3/8"-16UNC	14.0	10.9	RHS-302	♣
9.7	1-13/16"-17UN	22	4-1/2"-13UN	42	33.3	92.2	3/8"-16UNC	14.0	14.0	RHS-304	♣
9.7	1-13/16"-18UN	22	4-1/2"-12UN	42	33.3	92.2	3/8"-16UNC	14.0	21.8	RHS-306	♣
12.7	2-3/4"-16UN	19	6-1/4"-12UN	48	53.8	130.3	1/2"-13UNC	14.0	28.1	RHS-603	♥
12.7	2-3/4"-16UN	19	6-1/4"-12UN	48	53.8	130.3	1/2"-13UNC	14.0	30.0	RHS-604	♥
12.7	2-3/4"-16UN	19	6-1/4"-12UN	48	53.8	130.3	1/2"-13UNC	14.0	35.4	RHS-606	♥
12.7	4"-16UN	25	8-3/8"-12	60	79.0	177.8	5/8"-11UNC	19.0	63.0	RHS-1003	♥
12.7	4"-16UN	25	8-3/8"-13	60	79.0	177.8	5/8"-11UNC	19.0	73.0	RHS-1006	♥


HANDLE TYPES: ♣ WELDED ♥ REMOVABLE STRAP HANDLE



THE **RHD-SERIES** IS A DOUBLE ACTING HOLLOW PISTON ROD CYLINDER.

The hollow piston allows for a rod or cable to be inserted through the entire body length, while the double acting design improves speed of operation when longer stroke cylinders are required. They can be used in tensioning, load testing, bush extracting, and maintenance applications. All cylinders in this range have base mounting holes.

Consult Durapac for cylinders with custom tonnage and/or stroke

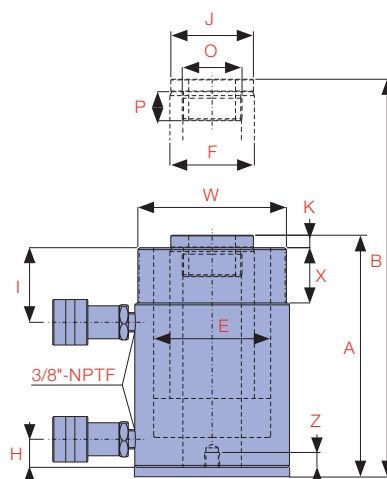

RHD-2006-128

EXCEEDS
ANSI/ASME B30.1
SAFETY
STANDARDS

RHD-1003

Model Number	Cylinder Capacity			Stroke (mm)	Cylinder Effective Area		Oil Capacity		A Collapsed Height (mm)	B Extended Height (mm)	D Outside Diameter (mm)	E Cylinder Bore Diameter (mm)
	ton*	Advance kN	Retract kN		Advance (cm ²)	Retract (cm ²)	Advance (cm ³)	Retract (cm ³)				
RHD-307	30	326	213	178	46.6	30.4	830	541	340	518	114	88.9
RHD-3010		326	213	258	46.6	30.4	1,203	784	441	699	114	88.9
RHD-603	60	576	377	94	82.3	53.8	732	479	259	348	159	123.9
RHD-606		576	377	166	82.3	53.8	1,366	893	335	501	159	123.9
RHD-6010		576	377	257	82.3	53.8	2,115	1,382	450	707	159	123.9
RHD-1001	100	931	612	38	133.0	87.4	506	332	181	219	212	165.1
RHD-1003		931	612	76	133.0	87.4	1,012	664	270	346	212	165.1
RHD-1006		931	612	153	133.0	87.4	2,037	1,337	358	511	212	165.1
RHD-10010		931	612	257	133.0	87.4	3,421	2,245	476	733	212	165.1
RHD-1508	150	1,429	718	203	204.1	102.6	4,142	2,082	365	568	247	190.5
RHD-2006-128	200	2,028	894	150	289.7	127.8	4,345	1,916	397	547	325	250.0
RHD-3006	300	3,004	1,346	150	429.2	192.3	6,438	2,885	351	501	350	270.0

* Nominal Cylinder Capacity in ton - see kN values for actual capacity

THE **CYLINDER KITS** ARE A CONVENIENT WAY TO PURCHASE REGULARLY REQUESTED CYLINDER AND HAND PUMP COMBINATIONS.

Popular cylinder combinations are available including low profile, aluminium and centre-hole. The range comprises 29 kit options that include a perfectly matched manual hand pump and 2 M hose with coupling. A 63 mm liquid filled pressure gauge with gauge adaptor is included with each kit.



Model	Capacity (ton)*	Stroke (mm)	Collapsed Height	Included in Set				
				Cylinder	Hand Pump	Hose	Gauge	Gauge Adaptor
Aluminium Cylinder Kits - Single Acting Spring Return								
CKA-302	30	50	181	AC-302	P-235A	HPS-0602CR	PG-63	FGA-1
CKA-306		150	281	AC-306	P-2200A	HPS-0602CR	PG-63	FGA-1
CKA-502	50	50	186	AC-502	P-235A	HPS-0602CR	PG-63	FGA-1
CKA-506		150	286	AC-506	P-2200A	HPS-0602CR	PG-63	FGA-1
Hollow Piston Cylinder Kits - Single Acting Spring Return								
CKH-121	12	42	120	RHS-121	P-270	HPS-0602CR	PG-63	FGA-1
CKH-123		76	184	RHS-123	P-270	HPS-0602CR	PG-63	FGA-1
CKH-202	20	49	162	RHS-202	P-270	HPS-0602CR	PG-63	FGA-1
CKH-206		155	306	RHS-206	P-270	HPS-0602CR	PG-63	FGA-1
CKH-302	30	64	178	RHS-302	P-270	HPS-0602CR	PG-63	FGA-1
CKH-306		155	330	RHS-306	P-2200	HPS-0602CR	PG-63	FGA-1
Low Profile Cylinder Kits - Single Acting Spring Return								
CKL-50	5	6	32	RFJ-50	P-270	HPS-0602CR	PG-63	FGA-1
CKL-100	10	12	43	RFJ-100	P-270	HPS-0602CR	PG-63	FGA-1
CKL-101		38	88	RLP-101	P-270	HPS-0602CR	PG-63	FGA-1
CKL-200	20	11	51	RFJ-200	P-270	HPS-0602CR	PG-63	FGA-1
CKL-201		45	98	RLP-201	P-270	HPS-0602CR	PG-63	FGA-1
CKL-300	30	13	58	RFJ-300	P-270	HPS-0602CR	PG-63	FGA-1
CKL-302		62	117	RLP-302	P-270	HPS-0602CR	PG-63	FGA-1
CKL-500	50	16	66	RFJ-500	P-270	HPS-0602CR	PG-63	FGA-1
CKL-502		60	122	RLP-502	P-270	HPS-0602CR	PG-63	FGA-1
CKL-1000	100	16	85	RFJ-1000	P-270	HPS-0602CR	PG-63	FGA-1
CKL-1002		57	141	RLP-1002	P-2200	HPS-0602CR	PG-63	FGA-1
General Jacking Cylinder Kits - Single Acting Spring Return								
CKG-102	10	54	121	RG-102	P-270	HPS-0602CR	PG-63	FGA-1
CKG-106		156	247	RG-106	P-270	HPS-0602CR	PG-63	FGA-1
CKG-252	25	50	165	RG-252	P-270	HPS-0602CR	PG-63	FGA-1
CKG-254		102	215	RG-254	P-270	HPS-0602CR	PG-63	FGA-1
CKG-256		158	273	RG-256	P-270	HPS-0602CR	PG-63	FGA-1
CKG-502	50	51	176	RG-502	P-2200	HPS-0602CR	PG-63	FGA-1
CKG-504		101	227	RG-504	P-2200	HPS-0602CR	PG-63	FGA-1
CKG-506		159	282	RG-506	P-2200	HPS-0602CR	PG-63	FGA-1

* Nominal Cylinder Capacity in ton - see kN values for actual capacity