# **BLJ SERIES**

## DURAPAC

#### **BATTERY JACKS**





Model Number	Jack Capacity (ton)	Battery Capacity (Ah)	Rated Voltage DC	Rated Power (W)	Rated Current (Amp)	Battery Energy (Wh)	Total Stroke (mm)	A Collapsed Height (mm)
BLJ30-2-150	30 / 15	5.0	18	450	24	90	148	150
BLJ30-2-150L	30 / 15	5.0	18	400	20	90	148	150
BLJ40-2-150	40 / 20	5.0	18	450	24	90	148	150
BLJ40-2-150L	40 / 20	5.0	18	400	20	90	129	150



**BATTERY JACKS** 



with trusted performance and an advanced design that protects the pack against harsh jobsite environments. Widely used and readily available

#### TILT ADJUSTABLE HANDLE

can be locked in 3 positions for ease of manoeuvring

#### **LOWERING VALVE**

for automatic control of lowering speed for safety

#### **EXTENSION LOAD CAPS**

two included with each jack to increase height and versatility

#### **EXTENSION HOLDERS**

with forward leaning design for easier access

#### **SOLID WHEELS**

for ease of manoeuvring

#### REPLACEMENT SPARES

available for all models

#### **CE CERTIFICATION**

designed and tested to standard EN1494 Mobile or moveable jacks



### LED LIGHT

to illuminate the lifting point

#### HARD CHROME PLATED PISTON ROD

for maximum corrosion resistance and cylinder life





CAPACITY RANGE

30 - 40 ton

TOTAL STROKE RANGE

129 - 148 mm

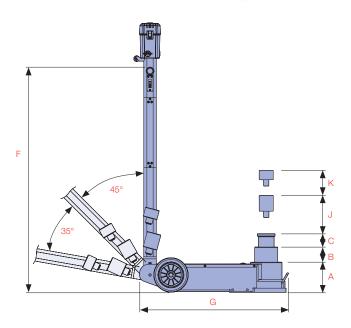



B (1st Stage) (2			C Stage)	F Handle Height	G Length	H Body Width	l Width at	J Extension	K Height	Weight
Capacity (ton)	Stroke (mm)	Capacity (ton)	Stroke (mm)	(mm)	(mm)	(mm)	Wheels (mm)	(mm)	(mm)	(kg)
30	78	15	70	1,304	555	178	272	75	45	40
30	78	15	70	1,300	695	172	272	75	45	45
40	78	20	70	1,304	567	188	272	75	45	42
40	72	20	57	1,300	710	189	272	75	45	49