



* Nominal Jack Capacity in ton - see kN values for actual capacity

REMOVABLE EXTENSION HANDLE

80 cm / 93 cm

HANDLE EFFORT

maximum 36 kg / 44 kg
with extension handle

RELEASE VALVE

allows for controlled lowering
and is recessed for protection
against accidental knocks

INTERNAL OIL RESERVOIR BLADDER

allows operation in horizontal
or vertical position

OIL RESERVOIR COVER

manufactured from aluminium
(6061)

LARGE ALUMINIUM BASE

one piece forged aluminium (7075T)
provides great support in soft ballast

CARRYING HANDLE

fixed in-line padded handle

CHROME PLATED

steel piston rod resists
corrosion and extends life

INTERNAL SPRING RETURN

allows an unloaded jack to
return to the retracted position

INDEXED TOE

minimises swivel and allows
for a safe, stable platform

LOAD CAPACITY

10 ton / 15 ton*
of lifting force

MINIMUM BASE HEIGHT

50 mm / 47 mm for
easy positioning under
the base of the rail




CAPACITY RANGE

10 - 15 ton*
83.3 - 150 kN



STROKE RANGE

220 - 225 mm

Feature details showing
measurements are shown
DRJ-10 / DRJ-15

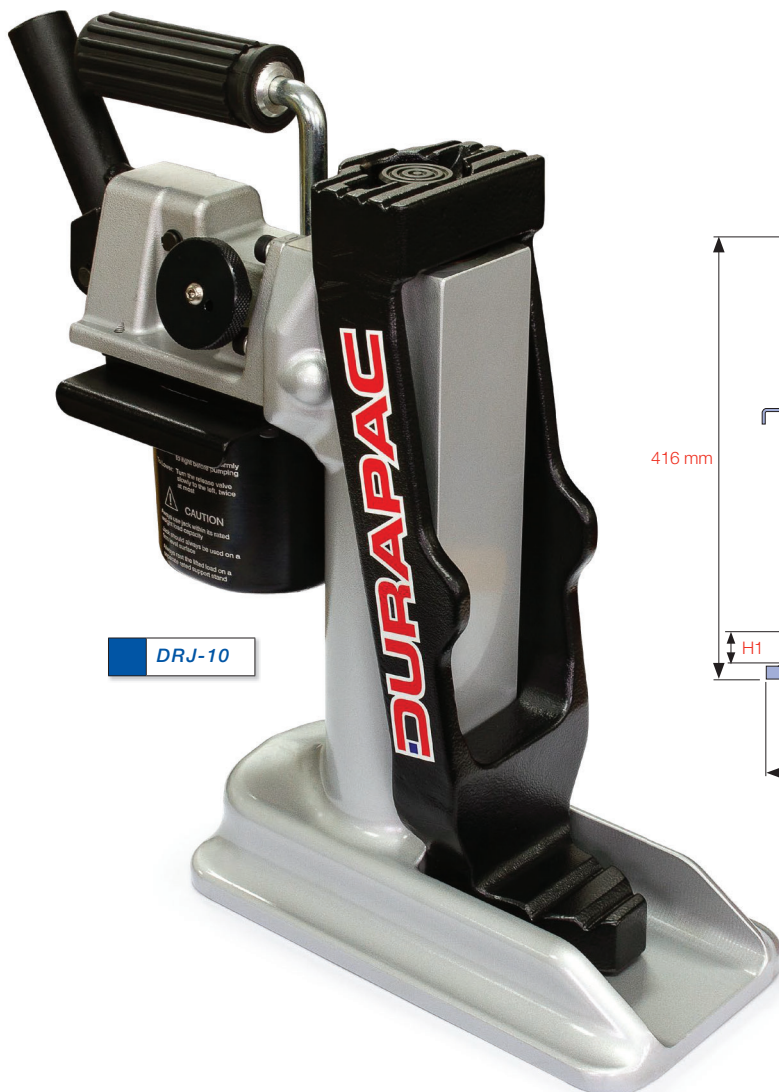

DRJ-10

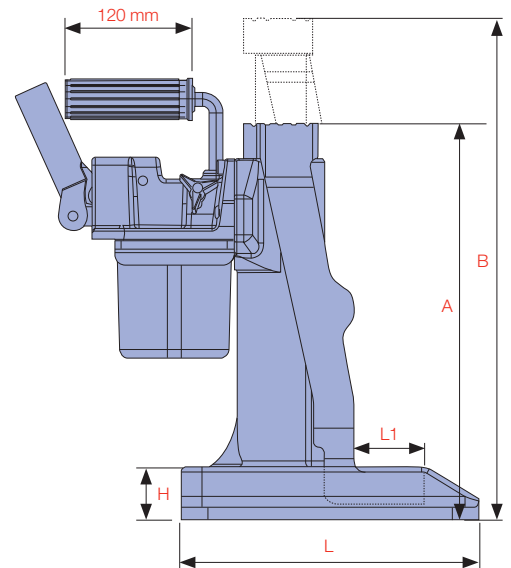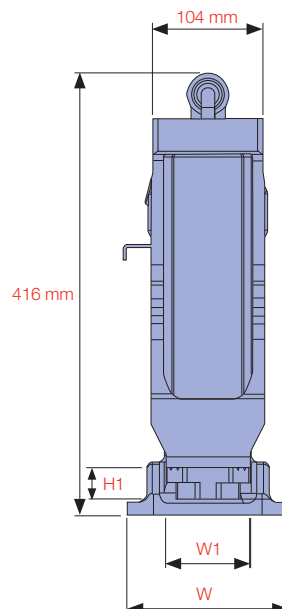

DRJ-10