

## HYDRAULIC PRESSURE GAUGES & ADAPTORS

### GAUGE ADAPTORS

#### FGA-1

3/8"-NPT male x 3/8"-NPT female x 1/4"-NPT female gauge adaptor on 16° angle




#### FGA-3

3/8"-NPT male x 3/8"-NPT female x 1/4"-NPT female gauge adaptor on 16° angle




#### FGA-18

3/8"-NPT male x 3/8"-NPT female x 1/4"-NPT female gauge adaptor

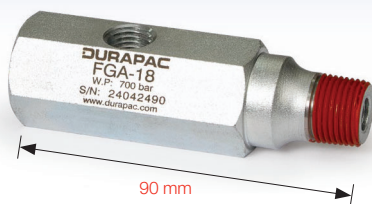

#### FGA-2

3/4"-16UNF x 9/16"-18UNF x 9/16"-18UNF 4,000 bar W.P gauge adaptor. Includes connection nipples to suit PG-100-40K and PG-100-60K pressure gauges and P-2100H hand pump

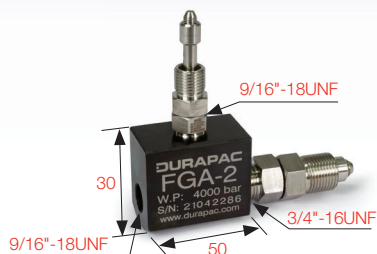

#### PG-100-40K

100 mm diam. 0-2,700 bar / 0-40,000 psi 9/16"-18UNF Female

#### PG-100-60K

100 mm diam. 0-4,000 bar / 0-60,000 psi 9/16"-18UNF Female

THE **PG-SERIES** HYDRAULIC PRESSURE GAUGES ARE RECOMMENDED FOR MONITORING ALL HYDRAULIC SYSTEMS.

Models are available from 63-150 mm face diameter and feature high quality stainless steel construction. Analogue models are liquid filled to increase longevity and are accurate to within 1% excluding model PG-63 (1.6%). The battery powered PGD-75 digital pressure gauge can be programmed with a cylinder effective area, quickly set to read in force measurements (kN, tonne, kg) or pressure measurements (bar, psi). It is accurate to within 0.25% and includes pressure peak hold functionality.

### GAUGES

#### PGD-75

75 mm diam. 0-1,000 bar / 0-11,600 psi 1/4"-NPT Male



#### PG-63

63 mm diam. 0-1,000 bar / 0-14,500 psi 1/4"-NPT Male

#### PG-100

100 mm diam. 0-1,000 bar / 0-14,500 psi 1/4"-NPT Male

#### PG-150

150 mm diam. 0-1,000 bar / 0-14,500 psi 1/4"-NPT Male



### Suitable for High Pressure

